

# 337

## Soft Serve Freezer

Twin Twist

### Features

Offer all the popular soft serve variations from low or non-fat ice creams to custards, yogurt and sorbet. Serve two separate soft serve flavors, or an equal combination of both in a twist.

#### Freezing Cylinder

Two, 2.8 quart (2.7 liter).

#### Mix Hopper

Two, 14 quart (13.2 liter). Separate hopper refrigeration (SHR) maintains mix below 41°F (5°C) in Auto and Standby modes.

#### Liquid Crystal Display (LCD)

Mix Low display alerts the operator to add mix. When mix is out, the unit automatically goes into Standby mode to prevent damage. Audible alarm sounds to alert the operator.

#### Electronic Controls

Finished product quality is monitored by Softech™ controls that measure viscosity. The LCD (Liquid Crystal Display) readout displays key operation information to monitor the performance of the freezer using our Diagnostic Display System (DDS). A security switch is located under the unit to lock out the touch pad controls for self service applications.

#### Standby

During long no-use periods, the standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.



Standard 6




LISTED  
SA2650



Selected 50  
Hz. Models

# 337 Soft Serve Freezer

337

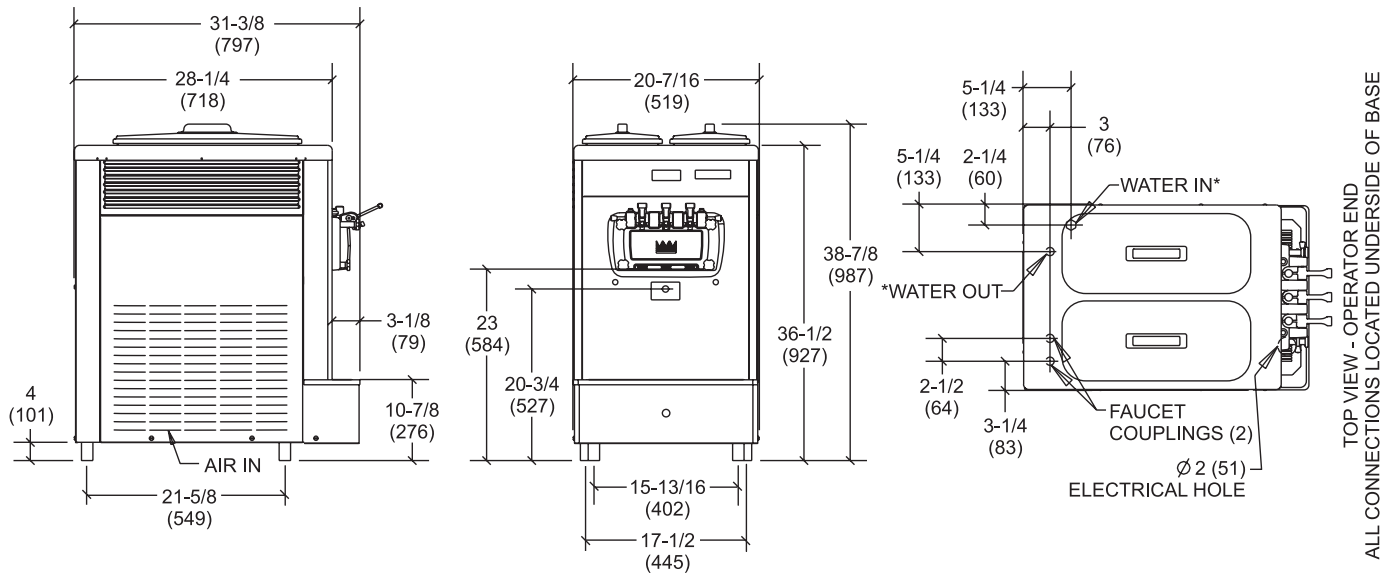

NOTE:  
1. FIGURES IN PARENTHESES INDICATE MILLIMETERS.  
\* WATER COOLED UNITS ONLY

Weights	lbs.	kgs.
Net	446	202.3
Crated	506	229.5
	cu. ft.	cu. m.
Volume	29.1	.81

Dimensions	in.	mm.
Width	20-7/16	519
Depth	31-3/8	797
Height	38-7/8	987
Counter Clearance	4	101

\*Mounted on standard legs

Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Poles (P) Wires (W)
208-230/60/1 Air	35	25	2P 3W
208-230/60/1 Water	35	25	2P 3W
208-230/60/3 Air	25	18	3P 4W
208-230/60/3 Water	25	17	3P 4W
220-240/50/1 Air	30	22	2P 3W
380-415/50/3N~ Air	12	10	4P 5W

*This unit may be manufactured in other electrical characteristics. Refer to the local Taylor Distributor for availability.  
(For exact electrical information, always refer to the data label of the unit.)*

## Bidding Specs

Electrical: Volt \_\_\_\_\_ Hz \_\_\_\_\_ ph \_\_\_\_\_  
Neutral:  Yes  No Cooling:  Air  Water  NA

Options: \_\_\_\_\_

## Specifications

### Electrical

One dedicated electrical connection is required. See the Electrical chart for the proper electrical requirements. Manufactured to be permanently connected. Consult your local Taylor distributor for cord & receptacle specifications as local codes allow.

### Beater Motor

One, 1.5 HP.

### Refrigeration System

One, 9,500 BTU/hr. R404A.  
Separate Hopper Refrigeration (SHR), One, 400 BTU/hr. R134a.  
(BTUs may vary depending on compressor used.)

### Air Cooled

Minimum 6" (152 mm) on both sides. Install the skirt provided on the right side of the unit and place the back of the unit against a wall to prevent recirculation of warm air. Minimum air clearances must be met to assure adequate air flow for optimum performance.

### Water Cooled

Water inlet and drain connections under side of base 3/8 FPT.

## Options

- Cone Dispenser
- Draw Valve Lock Kit
- Faucet
- Hopper Locks
- Sneeze Guard
- Syrup Rail Kit (side mount)

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.



**Taylor Company,**  
A Division of Carrier Commercial Refrigeration, Inc.  
Rockton, Illinois 61072  
815-624-8333 800-255-0626 Fax 815-624-8000  
www.taylor-company.com

Printed in U.S.A.  
044328-ADV 3/05